



DIRECTION OF SLOPE
"DOWN HILL"

CRANE PAD
TOTAL AREA - 140 sq.m
ADDITIONAL AFFECTED AREA - 40 sq.m

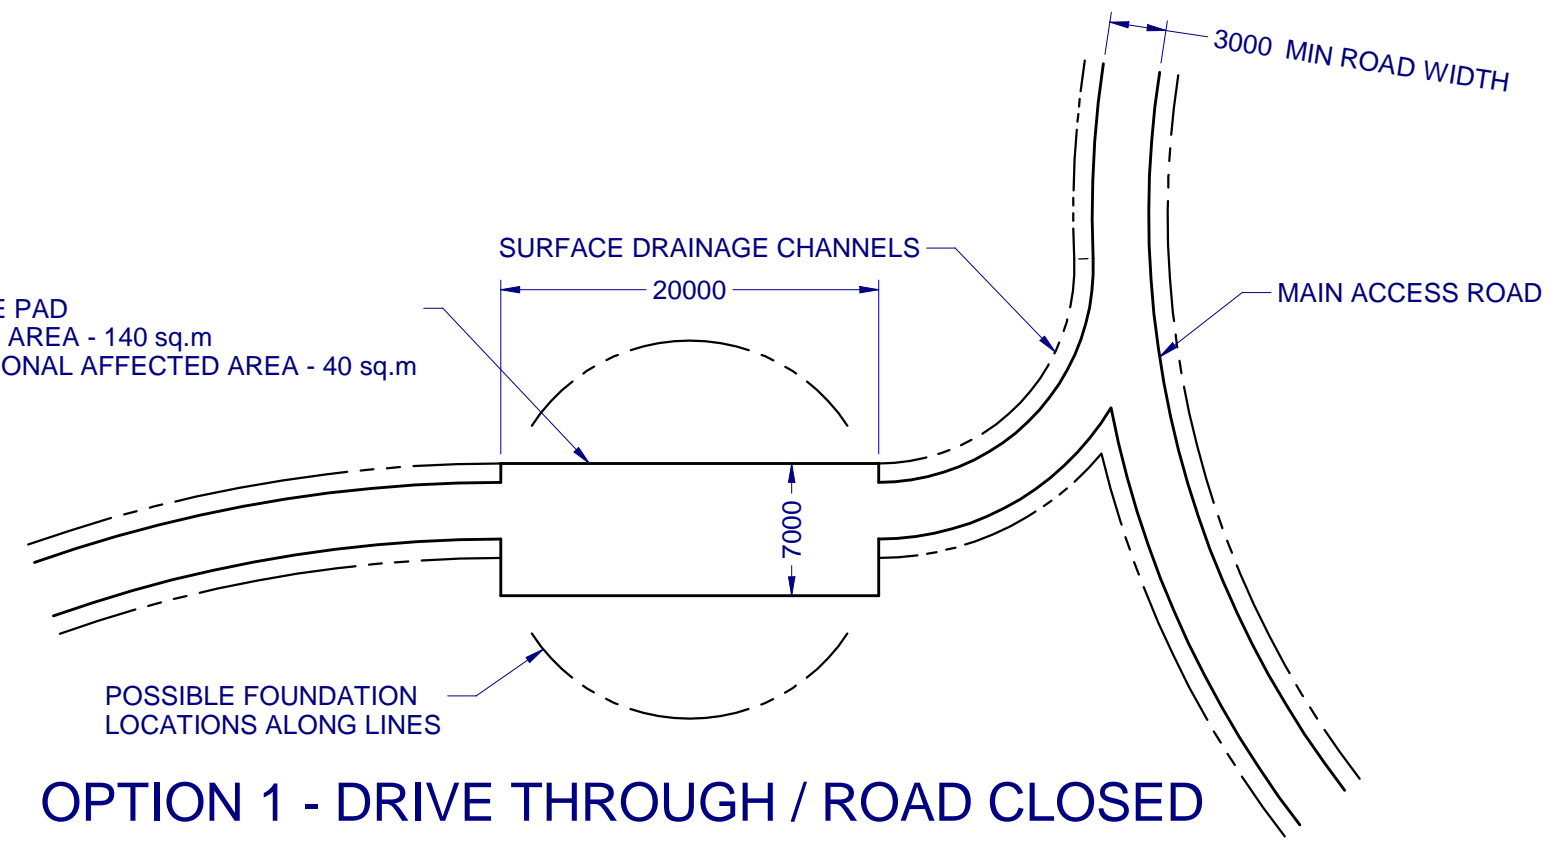


OPTION 1 - DRIVE THROUGH / ROAD CLOSED

CRANE PAD
TOTAL AREA - 140 sq.m
ADDITIONAL AFFECTED AREA - 40 sq.m

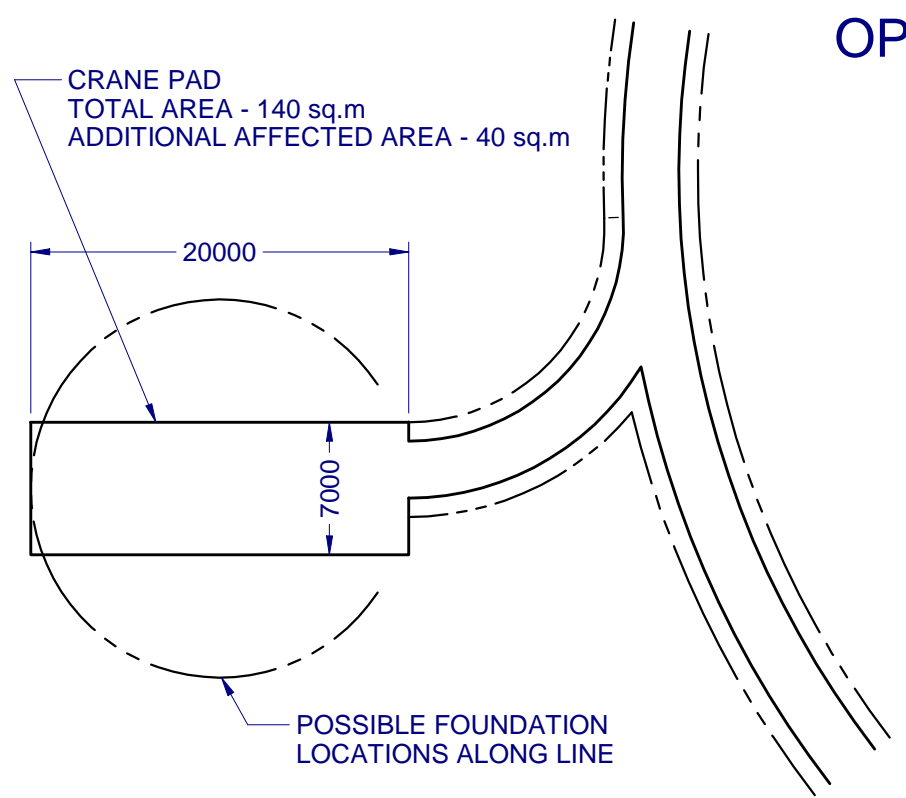

OPTION 2 - DEAD END

CRANE PAD
TOTAL AREA - 200 sq.m
ADDITIONAL AFFECTED AREA - 100 sq.m

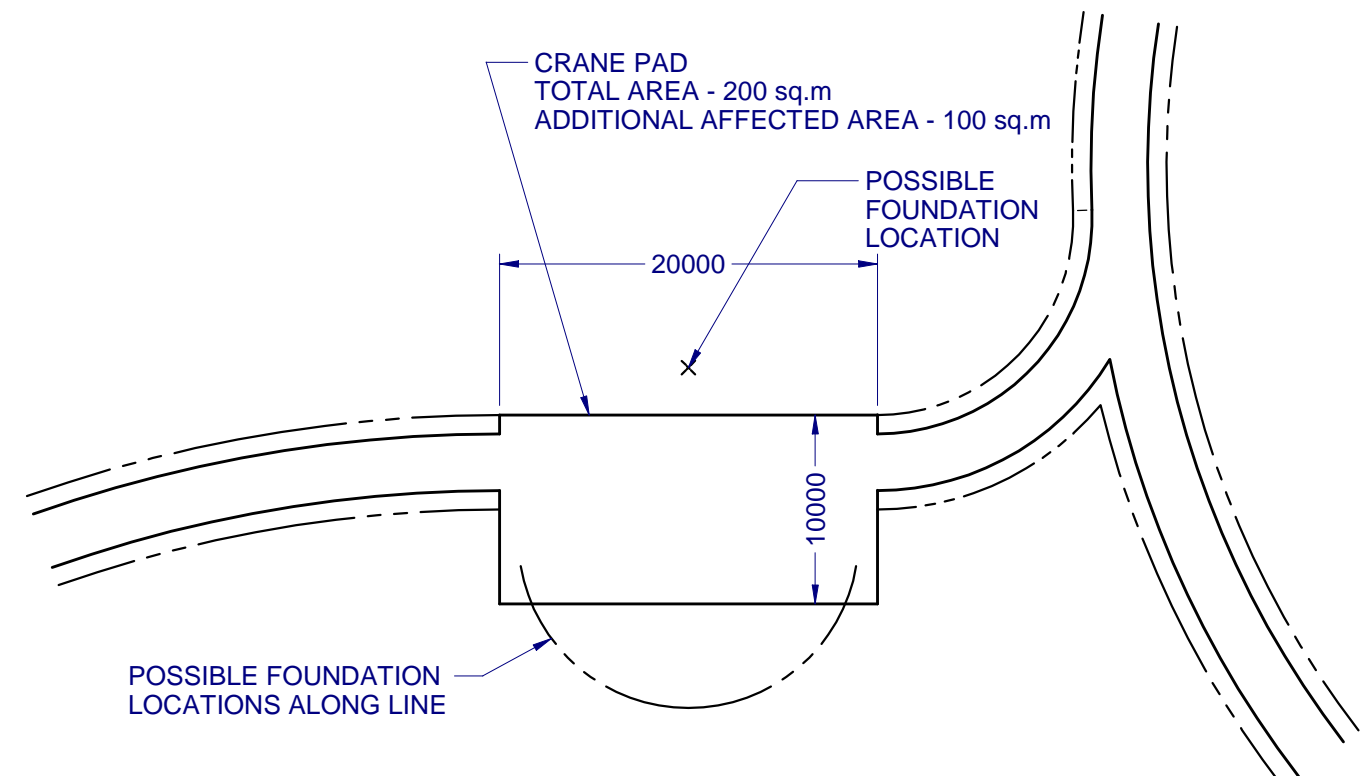

OPTION 3 - DRIVE THROUGH / ROAD REMAINS OPEN

DRAWING NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
3. THESE CRANE PADS HAVE BEEN DESIGNED TO MINIMISE ECOLOGICAL IMPACT AS WELL AS CONSTRUCTION COST.
4. ALL ROAD ENTRIES AND EXITS TO CRANE PADS ARE TO MEET THE REQUIREMENTS OF RADII, SLOPE, CURVATURE ETC TO SUIT STANDARD TRUCKS WITH 40FT DECKS.
5. CRANE PADS MUST HAVE SUFFICIENT COMPACTION FOR CRANE USE.
6. CRANE PADS ARE TO HAVE A MAXIMUM SLOPE OF 1:20 IN ALL DIRECTIONS.
7. THE FOUNDATION CENTRE CAN BE PLACED ANYWHERE ALONG LINES SHOWN.
8. FOUNDATION RL HEIGHT CAN BE WITHIN 2M OF THE CRANE PAD HEIGHT.
9. IF REQUIRED, OTHER FOUNDATION LOCATIONS WOULD BE POSSIBLE BY USING A LARGER CRANE. PLEASE DISCUSS THESE OPTIONS WITH WINDFLOW.

INCREASED POSSIBLE FOUNDATION LOCATIONS	WJP	AJH	GMH	23.08.08	0.1
REVISION	DRN	CHK	APPD	DATE	NO
SCALE: AS SHOWN	DRAWN WJP	DATE 14.08.08	CHECKED AJH	DATE 14.08.08	


APPROVED: *Geoff Henderson*

DRAWING TITLE:
W500 CRANE PAD DIMENSIONS
SHEET TITLE:
OVERVIEW OF OPTIONS

WINDFLOW TECHNOLOGY LTD
P.O. BOX 42-125, Christchurch
New Zealand

Ph +64 (3) 365 8960
Fax +64 (3) 365 1402
www.windflow.co.nz

DRAWING NO: 532-000101	REVISION
SHEET: 1 OF 4 ORIGINAL SIZE A3	0.1

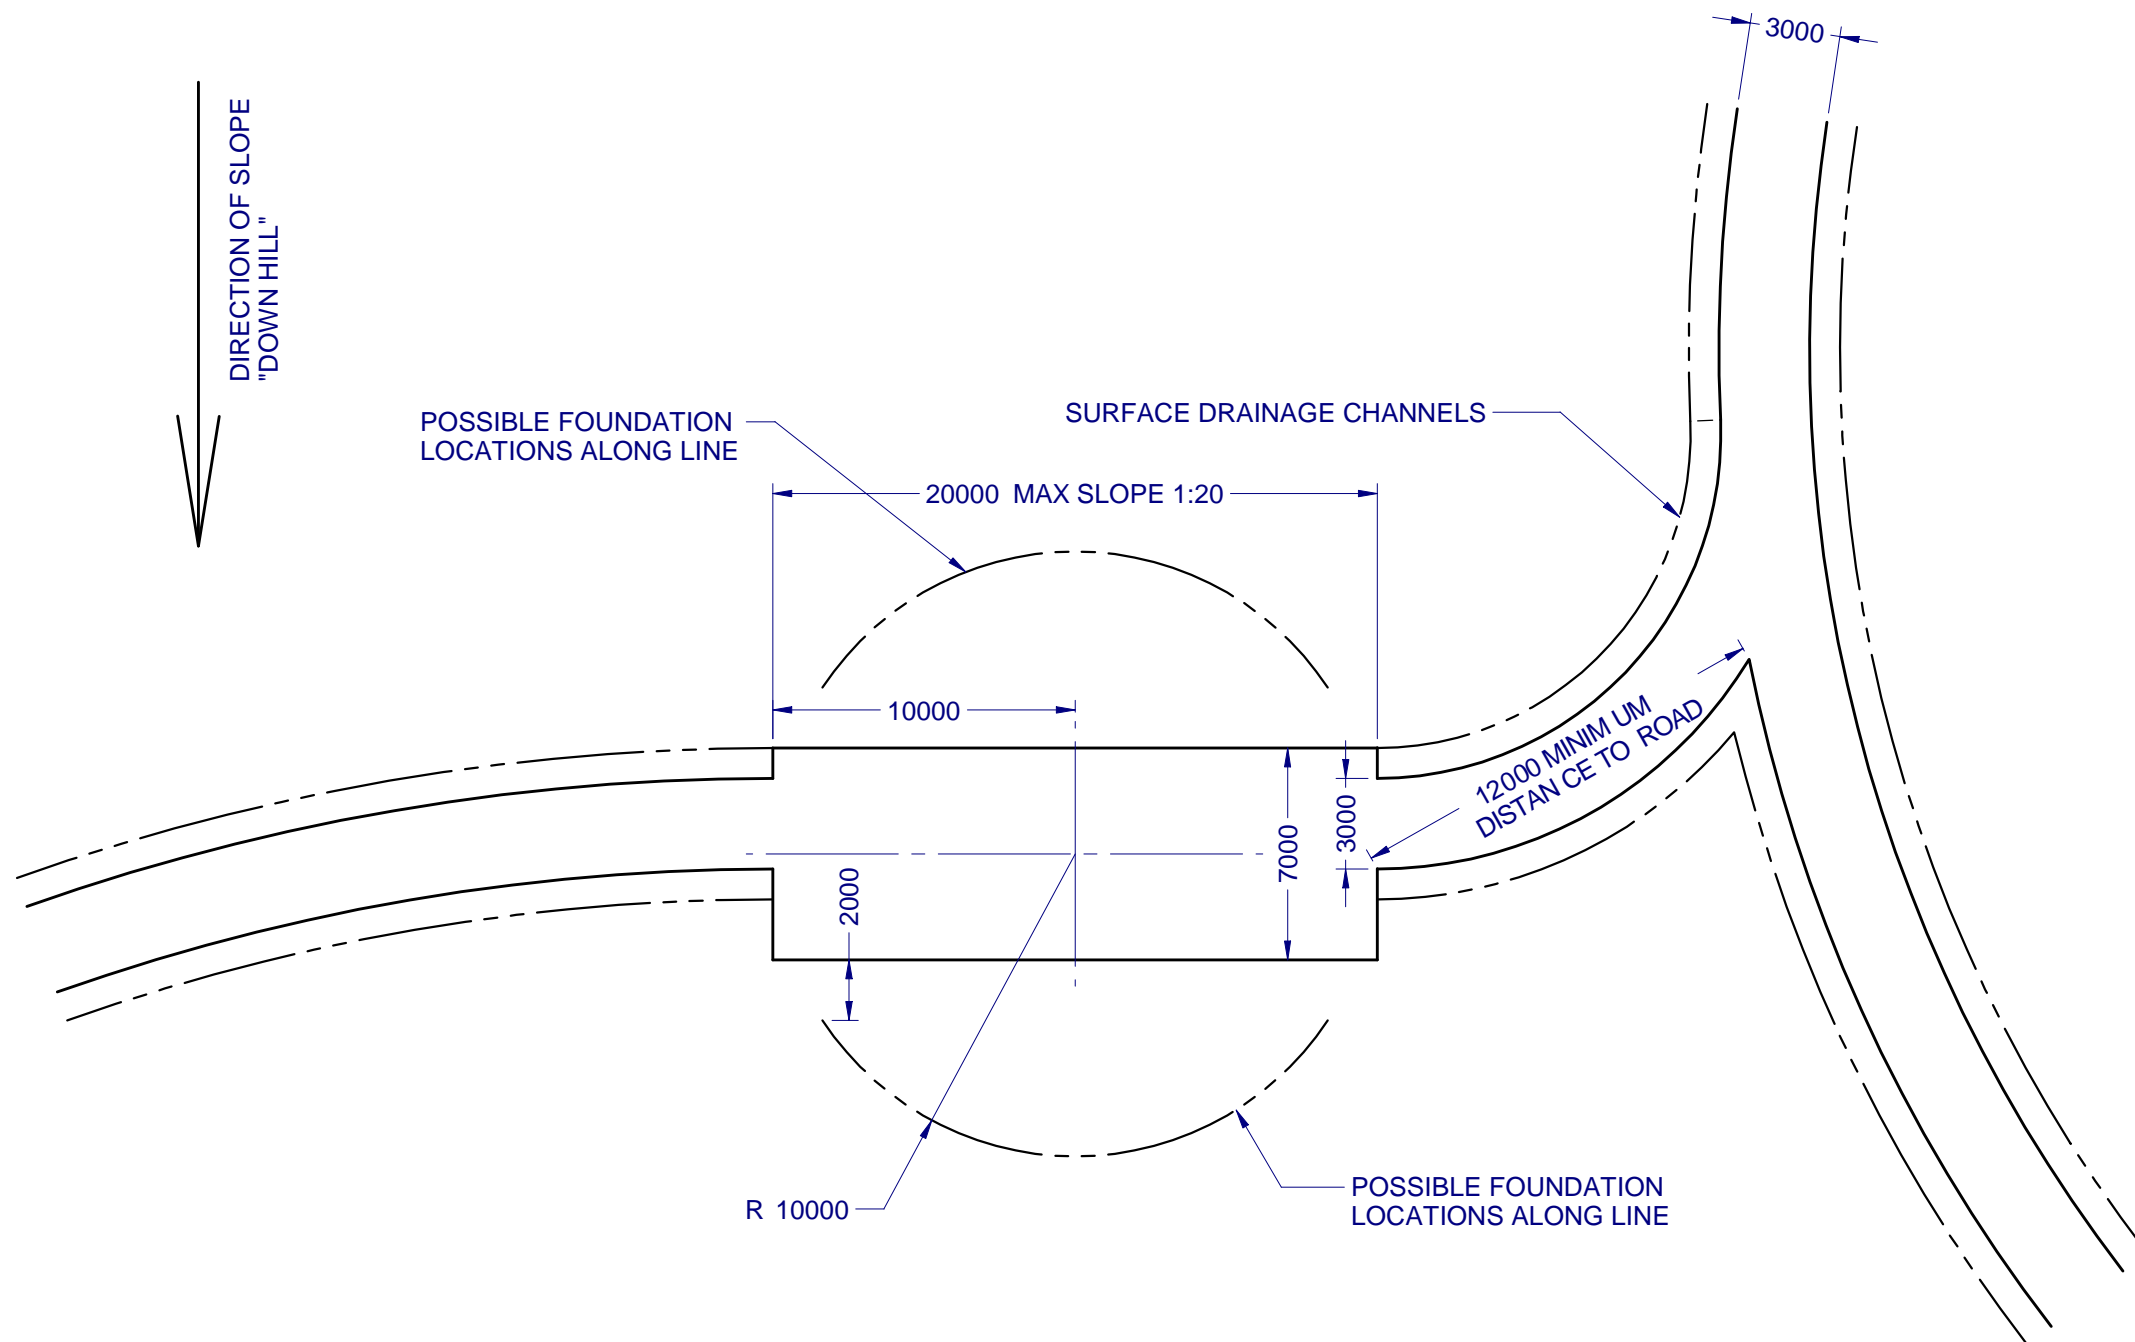

OPTION 1 - DRIVE THROUGH / ROAD CLOSED

DRAWING NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
3. THESE CRANE PADS HAVE BEEN DESIGNED TO MINIMISE ECOLOGICAL IMPACT AS WELL AS CONSTRUCTION COST.
4. ALL ROAD ENTRIES AND EXITS TO CRANE PADS ARE TO MEET THE REQUIREMENTS OF RADII, SLOPE, CURVATURE ETC TO SUIT STANDARD TRUCKS WITH 40FT DECKS.
5. CRANE PADS MUST HAVE SUFFICIENT COMPACTION FOR CRANE USE.
6. CRANE PADS ARE TO HAVE A MAXIMUM SLOPE OF 1:20 IN ALL DIRECTIONS.
7. THE FOUNDATION CENTRE CAN BE PLACED ANYWHERE ALONG LINES SHOWN.
8. FOUNDATION RL HEIGHT CAN BE WITHIN 2M OF THE CRANE PAD HEIGHT.
9. IF REQUIRED, OTHER FOUNDATION LOCATIONS WOULD BE POSSIBLE BY USING A LARGER CRANE. PLEASE DISCUSS THESE OPTIONS WITH WINDFLOW.

INCREASED POSSIBLE FOUNDATION LOCATIONS	WJP	AJH	GMH	23.08.08	0.1
REVISION	DRN	CHK	APPD	DATE	NO
SCALE: AS SHOWN	DRAWN WJP	DATE 14.08.08	CHECKED AJH	DATE 14.08.08	

APPROVED: *Geoff Henderson*

DRAWING TITLE:
W500 CRANE PAD DIMENSIONS
SHEET TITLE:
OPTION 1


WINDFLOW TECHNOLOGY LTD
P.O. BOX 42-125, Christchurch
New Zealand



Ph +64 (3) 365 8960
Fax +64 (3) 365 1402
www.windflow.co.nz

DRAWING NO: 532-000101	REVISION
SHEET: 2 OF 4 ORIGINAL SIZE A3	0.1

DIRECTION OF SLOPE
"DOWN HILL"

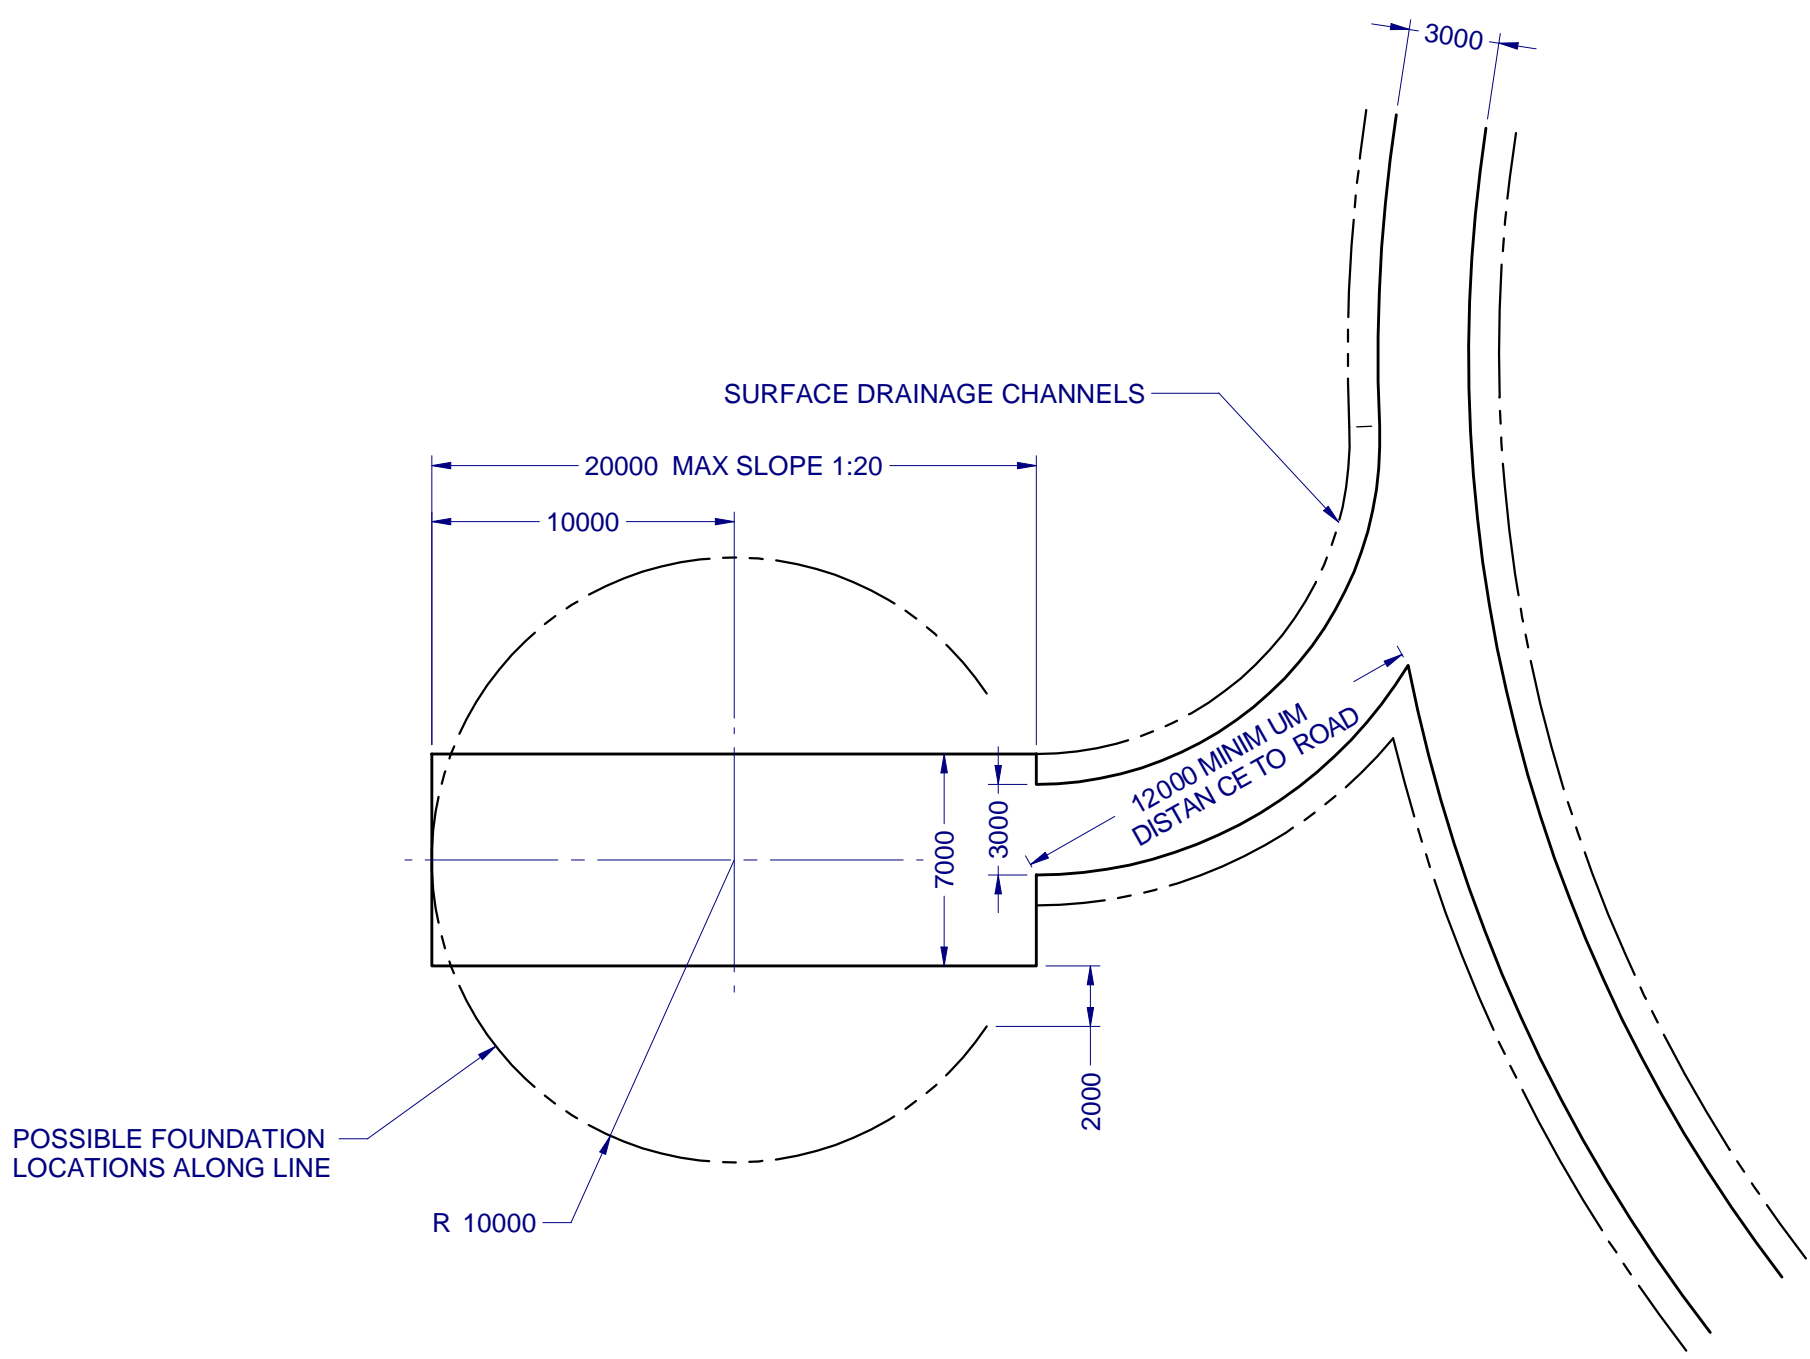

OPTION 2 - DEAD END

DRAWING NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
3. THESE CRANE PADS HAVE BEEN DESIGNED TO MINIMISE ECOLOGICAL IMPACT AS WELL AS CONSTRUCTION COST.
4. ALL ROAD ENTRIES AND EXITS TO CRANE PADS ARE TO MEET THE REQUIREMENTS OF RADII, SLOPE, CURVATURE ETC TO SUIT STANDARD TRUCKS WITH 40FT DECKS.
5. CRANE PADS MUST HAVE SUFFICIENT COMPACTION FOR CRANE USE.
6. CRANE PADS ARE TO HAVE A MAXIMUM SLOPE OF 1:20 IN ALL DIRECTIONS.
7. THE FOUNDATION CENTRE CAN BE PLACED ANYWHERE ALONG LINES SHOWN.
8. FOUNDATION RL HEIGHT CAN BE WITHIN 2M OF THE CRANE PAD HEIGHT.
9. IF REQUIRED, OTHER FOUNDATION LOCATIONS WOULD BE POSSIBLE BY USING A LARGER CRANE. PLEASE DISCUSS THESE OPTIONS WITH WINDFLOW.

INCREASED POSSIBLE FOUNDATION LOCATIONS	WJP	AJH	GMH	23.08.08	0.1
REVISION	DRN	CHK	APPD	DATE	NO
SCALE: AS SHOWN	DRAWN WJP	DATE 14.08.08	CHECKED AJH	DATE 14.08.08	


APPROVED: *Geoff Henderson*

DRAWING TITLE:
W500 CRANE PAD DIMENSIONS
SHEET TITLE:
OPTION 2

WINDFLOW TECHNOLOGY LTD
P.O. BOX 42-125, Christchurch
New Zealand

Ph +64 (3) 365 8960
Fax +64 (3) 365 1402
www.windflow.co.nz

DRAWING NO: 532-000101	REVISION
SHEET: 3 OF 4 ORIGINAL SIZE A3	0.1

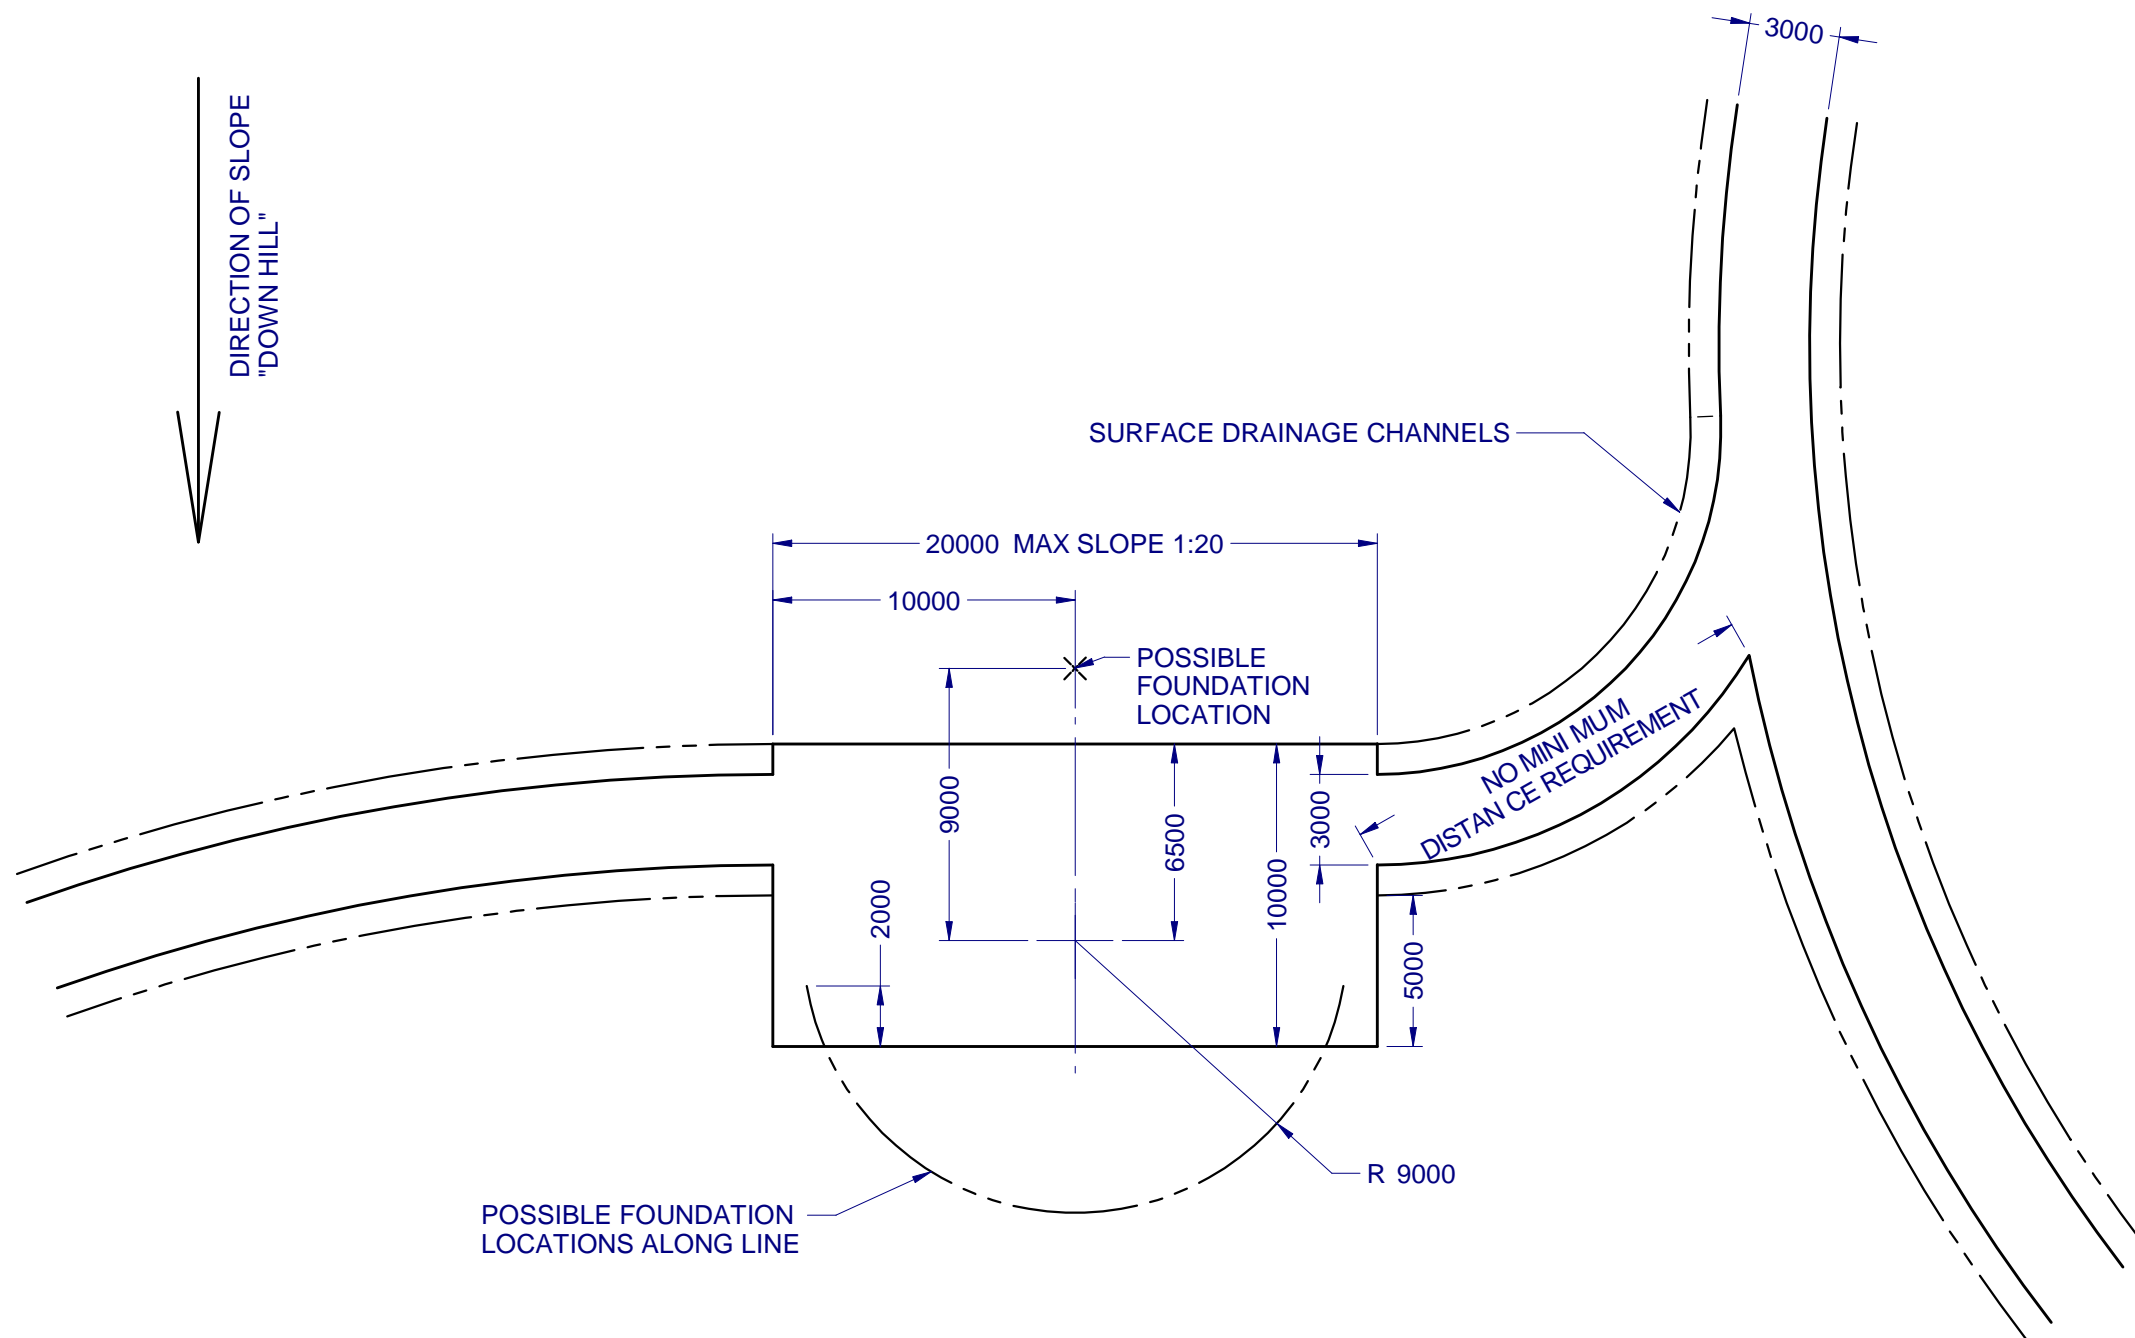

OPTION 3 - DRIVE THROUGH / ROAD REMAINS OPEN

DRAWING NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
3. THESE CRANE PADS HAVE BEEN DESIGNED TO MINIMISE ECOLOGICAL IMPACT AS WELL AS CONSTRUCTION COST.
4. ALL ROAD ENTRIES AND EXITS TO CRANE PADS ARE TO MEET THE REQUIREMENTS OF RADII, SLOPE, CURVATURE ETC TO SUIT STANDARD TRUCKS WITH 40FT DECKS.
5. CRANE PADS MUST HAVE SUFFICIENT COMPACTION FOR CRANE USE.
6. CRANE PADS ARE TO HAVE A MAXIMUM SLOPE OF 1:20 IN ALL DIRECTIONS.
7. THE FOUNDATION CENTRE CAN BE PLACED ANYWHERE ALONG LINES SHOWN.
8. FOUNDATION RL HEIGHT CAN BE WITHIN 2M OF THE CRANE PAD HEIGHT.
9. IF REQUIRED, OTHER FOUNDATION LOCATIONS WOULD BE POSSIBLE BY USING A LARGER CRANE. PLEASE DISCUSS THESE OPTIONS WITH WINDFLOW.

INCREASED POSSIBLE FOUNDATION LOCATIONS	WJP	AJH	GMH	23.08.08	0.1
REVISION	DRN	CHK	APPD	DATE	NO
SCALE: AS SHOWN	DRAWN WJP	DATE 14.08.08	CHECKED AJH	DATE 14.08.08	

APPROVED: *Geoff Henderson*

DRAWING TITLE:
W500 CRANE PAD DIMENSIONS
SHEET TITLE:
OPTION 3

WINDFLOW TECHNOLOGY LTD
P.O. BOX 42-125, Christchurch
New Zealand



Ph +64 (3) 365 8960
Fax +64 (3) 365 1402
www.windflow.co.nz

DRAWING NO: 532-000101	REVISION
SHEET: 4 OF 4 ORIGINAL SIZE A3	0.1